

TELELINE T4

New generation of innovative solution for slim light boxes with a depth of 100-150mm.
Due to professional optics only 4 modules per square meter is enough for the uniform illumination.
Starting from the depth of 100 mm a distance between centers of modules - 400 mm.
At least 50% LESS modules and consumed power per square meter.
Equipped with new generation of high efficiency 3030 LED chip
White color option available: 6500K

Specially designed for:

Slim light boxes
Recommended installation depth 100-150 mm


Features:

The smallest quantity of modules per square meter on the market !
Power consumption is only 16 W per square meter.
System efficiency up to 100 lm/W
Maximum Tj temperature <80 °C
LM80 international certificate for LEDs
Aluminium PCB and special thermal tape
High protection level of IP66
Fire protection level - V2
Light decay < 30%
after 60,000 hrs
5 years warranty


www.kaisenelectric.com



Dimensions

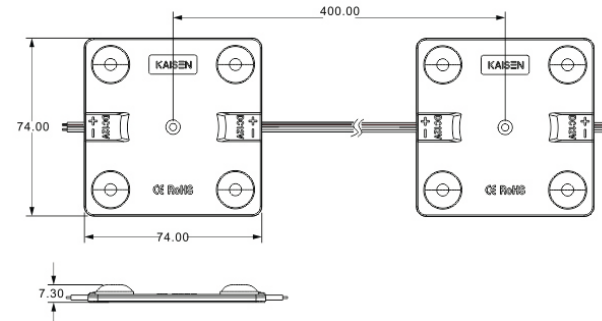

Light distribution graph

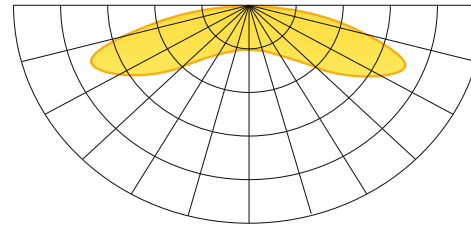

Beam angle: 175°



KAISEN

Technical information

Colors available :	☐
Power	4 W
Light output	400 lm
LED type	3030
Input	12V DC
Color temperature	☐ 6500 K
Beam angle	175°
Protection level	IP 66
Working temperature	-30 +50 °C

Packing information

Packing type	Chain	Package	Box
Quantity	10 pcs	50 pcs	400 pcs
Weight	0.5 kg	2.5 kg	20.3 kg

Illumination table

Installation depth	Distance between centers	Quantity per 1 sq m	Power per 1 sq m
100 mm	400 mm	4 pcs	16 W
120 mm	400 mm	4 pcs	16 W
140 mm	400 mm	4 pcs	16 W
150 mm	400 mm	4 pcs	16 W